

HEAT EXCHANGER
MODEL 731

STAINLESS STEEL TUBES / COPPER FINNS

5.8" x 10.5" x 1.8"



731SBM0

MODEL 731 is the second smallest standard size of the Thermatron Engineering **73 SERIES** Heat Exchanger Family. Built to market-highest quality standards **MODEL 731** features all-Stainless Steel tubing for ultra-clean or corrosive applications. **MODEL 731** provides maximum reliability heat transfer for closed-loop cooling in medical and industrial lasers, fuel cells, instrumentation, and many diverse high-end electronics applications.

Thermatron also manufactures many custom configurations of **MODEL 731** per specific dimensional and performance requirements. Please consult the factory for your application requirements.


731SBM0

731SBM1

SPECIFICATIONS

HX DESIGN:	Round tube / Wavy fin. Two tube-rows deep in air flow direction (deeper designs available upon request)	MAX. OPERATING PRESSURE:	150 PSIG continuous duty (higher pressure ratings available upon request)
MATERIALS:	316L Stainless Steel tubes / C11000 Copper fins / 5052-H32 Aluminum shroud	MAX. OPERATING TEMPERATURE:	316C
SIZE:	Air flow area 10" x 5", standard mounting receives (2) 119 mm fans	MAX. FAN OPERATING TEMPERATURE:	60C typical
WEIGHT:	3.4 lbs (no fans), 5.8 lbs (with fans)	FITTINGS:	3/8" or 1/2" OD tubes, 3/8" or 1/2" AN flare nuts, 3/8" or 1/2" hose beads, 1/4", 3/8", or 1/2" NPTF or NPTM, Metric, or any custom fitting specific to the application. All fittings also available with 90 degree bends rotated at any orientation. Alternate fittings available upon request. Brass, Stainless Steel, and other fitting materials available upon request.
FIN GEOMETRY:	Thermatron's unique riffled & corrugated wavy fin, 0.0053" thick, stacked 17.5 fins per inch, full collared	STANDARD FANS:	EBM 4600N (115VAC), EBM 4650N (230VAC), or EBM 4184NX (24VDC). Many alternate fans are available. MODEL 731 can also be provided without fans.
TUBE GEOMETRY:	(6) tubes per row x (2) rows = (12) total tubes. Tubes 0.375" OD x 0.028" wall located on 0.750" centers. Rows located on 0.650" centers.	THERMAL PERFORMANCE:	35-to-85 W/C pending fan selection and coolant flow (see performance curves)
TUBE CIRCUIT:	One all-series circuit of (12) tubes. Alternate parallel circuits are available for reduced coolant dP applications.	RoHS:	All standard 73 SERIES heat exchangers can be made RoHS compliant upon request. Any alternate fans, sensors, or non-standard fitting may affect RoHS compliance. Please consult the factory.
MAX. RECOMMENDED FLOW:	(Tap water) 4 GPM for standard all-series tube circuit / 8 GPM for optional parallel tube circuit		
COOLANT COMPATIBILITY:	Corrosive coolants (Typically deionized water or other aggressive coolants)		
PRESSURE TEST:	100% pressure tested at 150 PSIG Nitrogen under water.		

SUPERIOR CONSTRUCTION

FINS:

C11000 Copper, Oxygen-free high thermal conductivity (OFHC). Thermatron's unique riffled & corrugated wavy fin, 0.0053" thick, stacked 17.5 fins per inch. The highest thermal performer in its class worldwide. Mechanically-expanded full collar fin/tube interface for maximum heat transfer.

METAL JOINING:

All joints precision TIG welded by Thermatron experts under Argon purge to keep tube interiors free of oxidation and ensure weld integrity. Thermatron TIG welds have no known life failures after 40+ years of field operation. All **73 SERIES** heat exchangers are 100% pressure tested at 150 PSIG Nitrogen under water. Thermatron inspectors scribe their unique ID code on every HX to confirm successful pressure test.

WETTED INTERIOR:

Tubes, manifolds, return bends, and fittings 316L Stainless Steel. All core tubes 0.375" OD x 0.028" wall thickness. Precision "1D" tube bends are supported by internal mandrels for smooth ID flow, minimizing distortion and wall thinning.

EXTERIOR:

All **73 SERIES** heat exchanger shrouds are 5052-H32 Aluminum x 0.060" thick and have gold iridite finish.

QUALITY ASSURANCE:


All **73 SERIES** heat exchangers are 100% pressure tested at 150 PSIG Nitrogen under water. Thermatron inspectors scribe their unique ID code on every HX to confirm successful pressure test.

DATE CODE:

All **73 SERIES** heat exchangers are date coded by lot.

INTERNAL CLEANLINESS:

Industry-leading internal tube cleanliness, computer grade. High temperature / high flow flushes of Liqualin, Drycid and neutralizer, followed by COBRATEC 99 flush for corrosion inhibition.

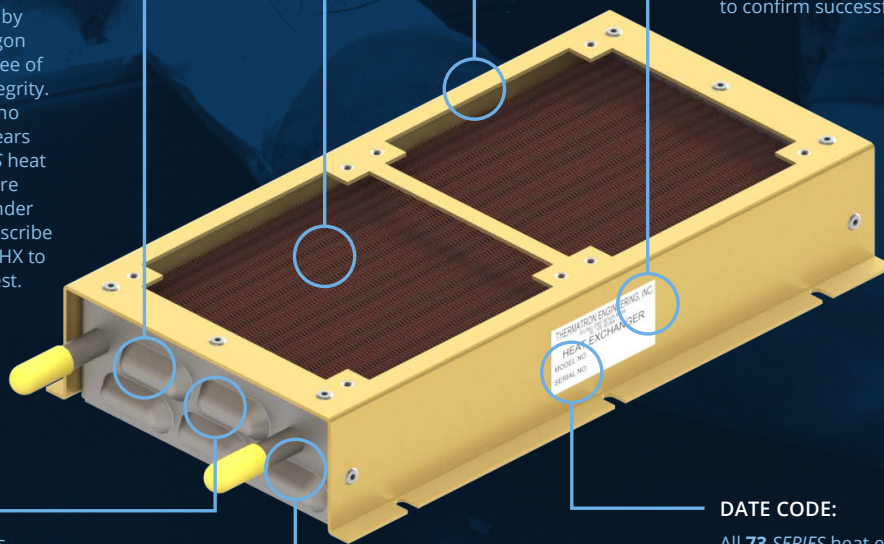

FAN SELECTION

The intersection of the heat exchanger pressure curve (black curve) with the chosen fan performance curve is the expected air flow through the heat exchanger, assuming no additional air flow restrictions other than the heat exchanger itself (e.g. cabinet blockage, ducts, bends in air loop, dust filters, etc.) As a baseline, Fans A, B and C represent standard selections for 230VAC, 24VDC, and 115VAC respectively. If higher thermal performance is required a stronger (and louder) fan option like Fan D, E, or F can be selected to increase the airflow.


Air flow direction is available in two options (by flipping fan):

- 1. PUSH AIR** - Air enters fan first and exhausts through HX last. Slightly better for applications cooling the water.
- 2. PULL AIR** - Air enters HX first and exhausts through fan last. Slightly better for applications cooling the air.

Air flow direction does not affect volumetric air flow.


PRESSURE DROP vs. AIRFLOW

Air Properties @ 30C, 1 bar

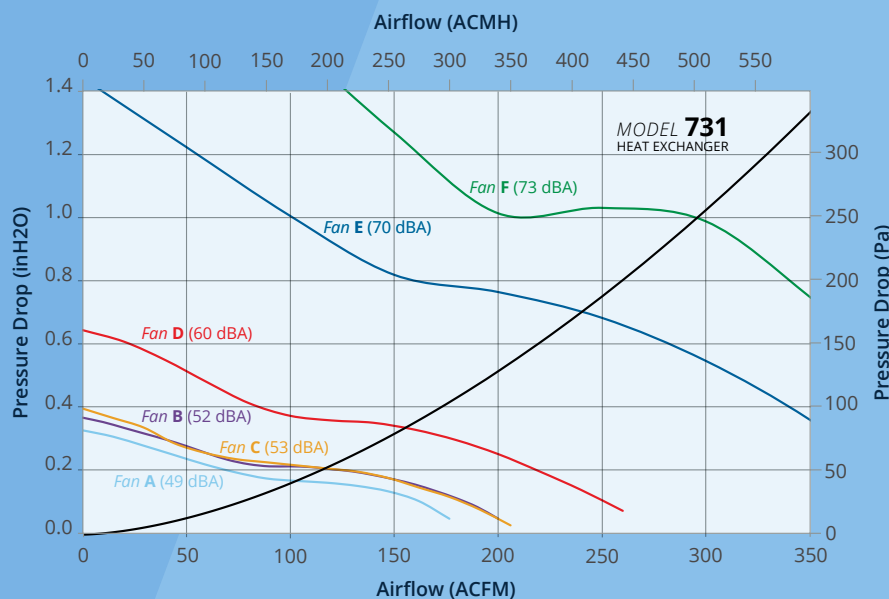

PRESSURE DROP vs. COOLANT FLOW

Water Properties @ 40C

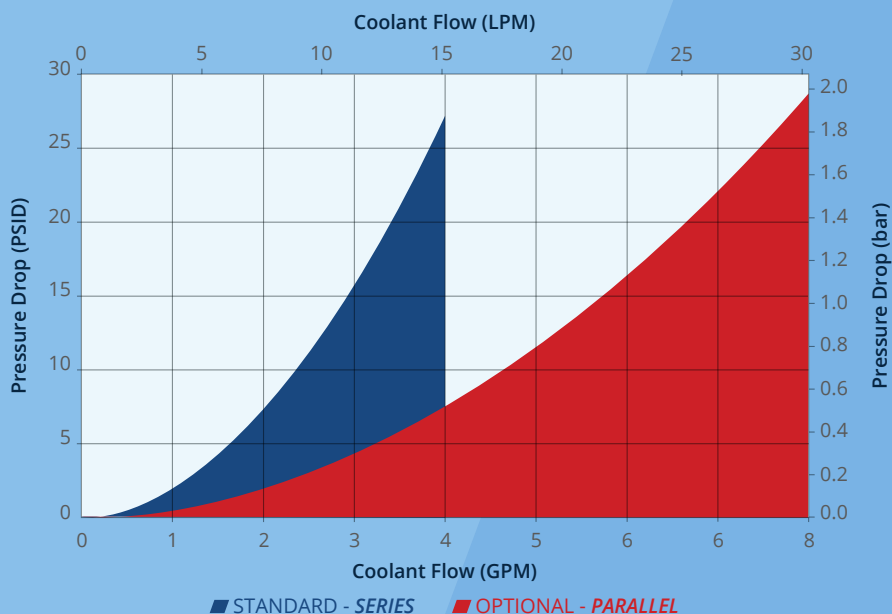

PUMP SELECTION

MODEL 731 Heat Exchanger standard plumbing configuration has all 12 tubes connected in one series circuit. This maximizes coolant velocity and thermal performance but also increases coolant pressure drop as shown by the blue line. Maximum recommended flow is 4 GPM for the series circuit in order to avoid long-term erosion corrosion. For coolant flows > 4 GPM, or for lower desired pressure drop, the plumbing configuration can also be split into two parallel circuits as shown by the red line. Splitting the flow in this way results in a small decrease in thermal performance of approximately 5%, but increases the maximum recommended flow to 8 GPM. For flows > 8 GPM **MODEL 731** can also be offered with 3 or 6 parallel circuits. Please contact Thermatron Engineering directly to discuss specific application requirements.

PERFORMANCE

Heat exchangers require some temperature difference between the entering liquid and entering air in order to transfer heat, the larger this temperature difference, the more heat can be transferred.

Thermal performance of all Thermatron Engineering heat exchangers is determined as follows:

COOLING THE WATER:


$$\text{PERFORMANCE (W/C)} = \frac{\text{Heat Load (W)}}{\text{Water Temp Enter HX (°C) - Air Temp Enter HX (°C)}}$$

COOLING THE AIR:

$$\text{PERFORMANCE (W/C)} = \frac{\text{Heat Load (W)}}{\text{Air Temp Enter HX (°C) - Water Temp Enter HX (°C)}}$$

THERMAL PERFORMANCE vs. AIRFLOW


Water Properties @ 40C, Air Properties @ 30C, 1 Bar

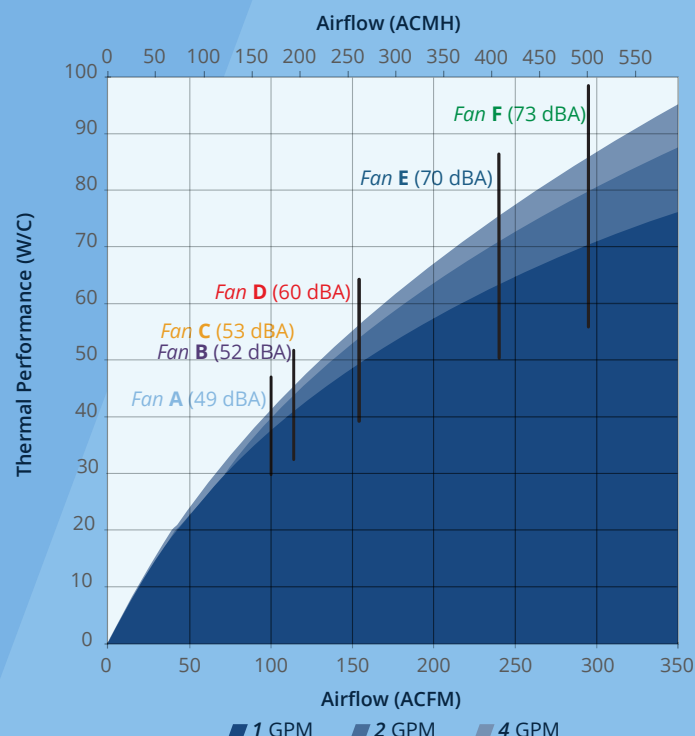

TABULATED PERFORMANCE

HEAT EXCHANGER	FAN	FAN P/N	FAN VOLTAGE	FAN NOISE (PER FAN/TOTAL)	PRESSURE DROP & AIRFLOW	PRESSURE DROP & WATER FLOW	HEAT LOAD WHEN: (WATER TEMP IN) - (AIR TEMP IN) =			
							1C	10C	30C	50C
Model 731	Fan A	(2) EBM 4650 N	230VAC, 50 Hz	46/49 dB(A)	0.16 in H2O @ 100 ACFM	1.9 PSID @ 1.0 GPM	37.3 W	373 W	1118 W	1863 W
						7.2 PSID @ 2.0 GPM	39.6 W	396 W	1187 W	1979 W
						27.2 PSID @ 4.0 GPM	40.9 W	409 W	1226 W	2043 W
Model 731	Fan B	(2) EBM 4184 NX	24VDC	49/52 dB(A)	0.20 in H2O @ 114 ACFM	1.9 PSID @ 1.0 GPM	40.6 W	406 W	1219 W	2032 W
						7.2 PSID @ 2.0 GPM	43.5 W	435 W	1304 W	2173 W
						27.2 PSID @ 4.0 GPM	45.0 W	450 W	1351 W	2252 W
Model 731	Fan C	(2) EBM 4600 N	115VAC, 60 Hz	50/53 dB(A)	0.20 in H2O @ 114 ACFM	1.9 PSID @ 1.0 GPM	40.6 W	406 W	1219 W	2032 W
						7.2 PSID @ 2.0 GPM	43.5 W	435 W	1304 W	2173 W
						27.2 PSID @ 4.0 GPM	45.0 W	450 W	1351 W	2252 W
Model 731	Fan D	(2) EBM 4184 NXH	24VDC	57/60 dB(A)	0.33 in H2O @ 154 ACFM	1.9 PSID @ 1.0 GPM	49.1 W	491 W	1472 W	2454 W
						7.2 PSID @ 2.0 GPM	53.4 W	534 W	1602 W	2671 W
						27.2 PSID @ 4.0 GPM	55.9 W	559 W	1677 W	2795 W
Model 731	Fan E	(2) EBM 4114 NH4	24VDC	67/70 dB(A)	0.70 in H2O @ 240 ACFM	1.9 PSID @ 1.0 GPM	63.0 W	630 W	1890 W	3150 W
						7.2 PSID @ 2.0 GPM	70.6 W	706 W	2119 W	3532 W
						27.2 PSID @ 4.0 GPM	75.2 W	752 W	2257 W	3761 W
Model 731	Fan F	(2) EBM 4114 N/2H5	24VDC	70/73 dB(A)	0.99 in H2O @ 295 ACFM	1.9 PSID @ 1.0 GPM	70.0 W	700 W	2099 W	3498 W
						7.2 PSID @ 2.0 GPM	79.6 W	796 W	2389 W	3981 W
						27.2 PSID @ 4.0 GPM	85.6 W	856 W	2567 W	4279 W

TECHNICAL DRAWING (731SLM0)

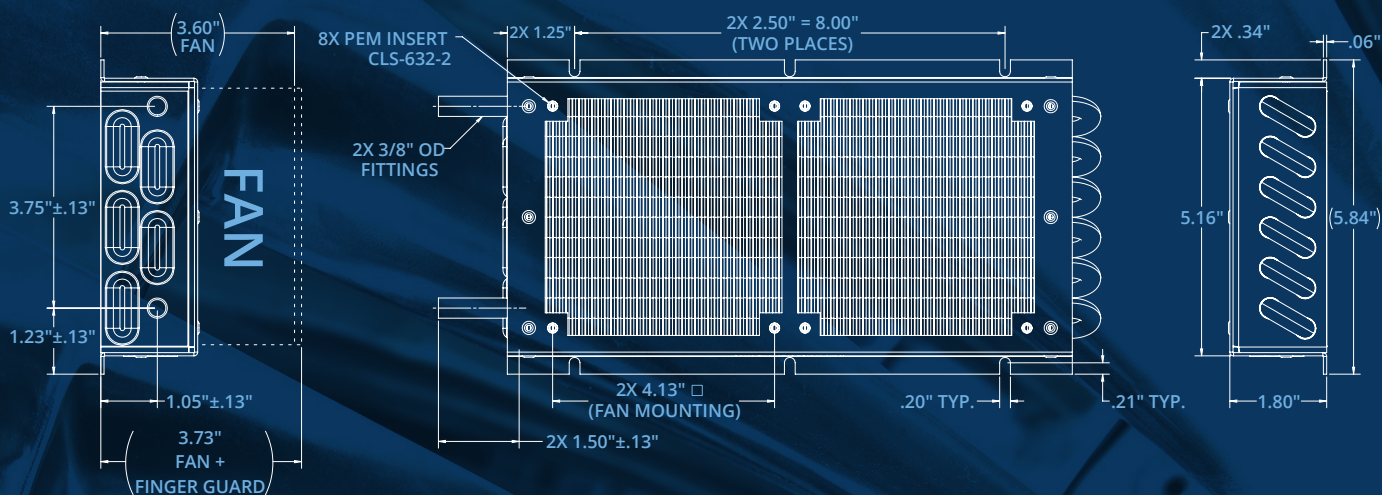

MORE STANDARD MODEL 731 DRAWINGS

731SBM0

731SLM1

731SRM0

731TLM1

731SBM1

731SNM0

731TBM0

731TLM5

731SBM2

731SPM0

731TBM2

731TPM0

731SBM5

731SPM2

731TBM5

731TPM1

731SLM0

731SPM5

731TLM0

PART NUMBERING SYSTEM

- FIN / TUBE MATERIAL**
2 = CU FIN / CU TUBE
3 = CU FIN / SS TUBE
4 = SS FIN / SS TUBE
5 = CU FIN / CU-NI TUBE
6 = AL FIN / SS TUBE
7 = AL FIN / CU TUBE

- FITTING GEOMETRY**
M = OTHER
S = STRAIGHT
T = 90° ANGLED FITTING

LTR	FAN SIZE	FAN SHAPE	FASTENER	MOUNTING PATTERN
S	80 mm	SQUARE	(4) #6-32	71.5 x 71.5 mm
M	119 mm	SQUARE	(4) #6-32	104.8 x 104.8 mm
P	172 mm	ROUND	(4) #6-32	162 mm BC
J	172 x 150 mm	OVAL	(4) #6-32	162 mm BC
T	176 mm	SQUARE	(4) #10-32	152.4 x 152.4 mm
E	225 mm	SQUARE	(4) #8-32	240 mm BC
C	254 mm	ROUND	(8) #8-32	246 mm BC
O	OTHER	OTHER	OTHER	OTHER


7 3 1 X X M X A X X

- HEAT EXCHANGER SIZE**
0 = 1 FAN (119 mm SQ)
1 = 2 FANS (119 mm SQ)
2 = 1 FAN (172 mm RND)
3 = 2 FANS (172 mm RND)
4 = 1 FAN (254 mm RND)
5 = 2 FANS (254 mm RND)
6 = 6 FANS (172 x 150 mm OVAL)
7 = 4 FANS (254 mm RND)

- FITTING TERMINATION**
B = HOSE BEAD (3/8")
L = STRAIGHT TUBE (3/8")
N = 37° FLARE NUT (3/8")
P = NPT FEMALE (1/4")
R = HOSE BARB (3/8")
C = OTHER

- FAN VOLTAGE**
0 = FAN NOT SUPPLIED
1 = 110VAC
2 = 220VAC
3 = OTHER
4 = 12VDC
5 = 24VDC
6 = 48VDC

- CUSTOM NUMBER**
 ASSIGNED BY THERMATRON
**INDICATES CUSTOM AND
 VERSION LEVEL**
 ASSIGNED BY THERMATRON

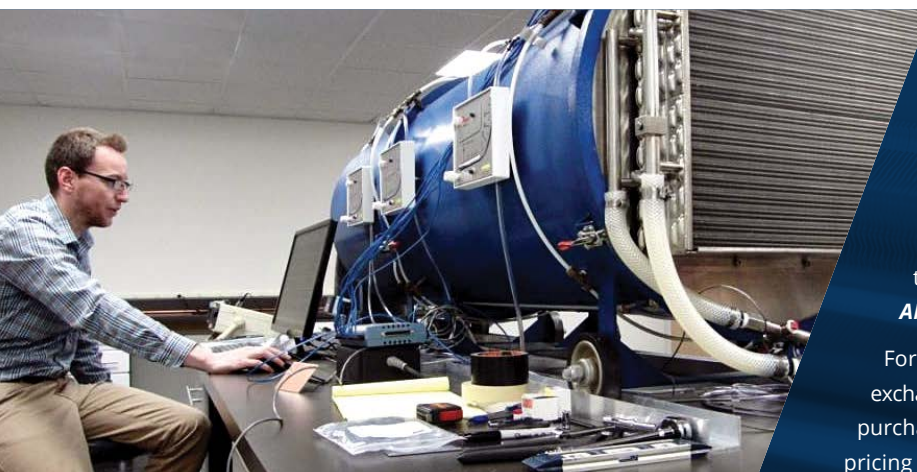

CONTACT OUR EXPERTS

Our thermal experts will be happy to review your application and offer standard or custom solutions, including thermal analysis (single phase or multi-phase) and CAD drawings tailored to your special requirements...**ALL AT NO CHARGE AND WITHIN 24 HOURS!**

For many custom applications Thermatron will also ship heat exchanger prototypes for **FREE 90-DAY CLIENT EVALUATIONS**, with purchase subject only to **COMPLETE CLIENT SATISFACTION**, and pricing subject only to follow-on orders. Thermatron engineers will also add recommendations for fans, pumps, filters, fittings, cabinet adaptations, brackets, etc., so that you receive the best overall thermal solution the very first time...**PUT US TO THE TEST!**

For more information please contact the factory at **978.687.8844** or **INFO@THERMATRONENG.COM**.