

HEAT EXCHANGER

MODEL 733

STAINLESS STEEL TUBES / COPPER FINS

9.0" X 16.1" X 2.6"



733TBPO

MODEL 733 is a mid-size model of the Thermatron Engineering **73 SERIES** Heat Exchanger Family. Built to market-highest quality standards **MODEL 733** features all-Stainless Steel tubing for ultra-clean or corrosive applications. **MODEL 733** provides maximum reliability heat transfer for closed-loop cooling in medical and industrial lasers, fuel cells, instrumentation, and many diverse high-end electronics applications.

Thermatron also manufactures many custom configurations of **MODEL 733** per specific dimensional and performance requirements. Please consult the factory for your application requirements.



733TBP0



733TBP1

SPECIFICATIONS

HX DESIGN:	Round tube / Wavy fin. Two tube-rows deep in air flow direction (deeper designs available upon request)	MAX. OPERATING PRESSURE:	150 PSIG continuous duty (higher pressure ratings available upon request)
MATERIALS:	316L Stainless Steel tubes / C11000 Copper fins / 5052-H32 Aluminum shroud	MAX. OPERATING TEMPERATURE:	316C
SIZE:	Air flow area 15.9" x 8", standard mounting receives (2) 172 mm fans	MAX. FAN OPERATING TEMPERATURE:	60C typical
WEIGHT:	9.4 lbs (no fans), 13.6 lbs (with fans)	FITTINGS:	3/8" or 1/2" OD tubes, 3/8" or 1/2" AN flare nuts, 3/8" or 1/2" hose beads, 1/4", 3/8", or 1/2" NPTF or NPTM, Metric, or any custom fitting specific to the application. All fittings also available with 90 degree bends rotated at any orientation. Alternate fittings available upon request. Brass, Stainless Steel, and other fitting materials available upon request.
FIN GEOMETRY:	Thermatron's unique riffled & corrugated wavy fin, 0.0053" thick, stacked 17.5 fins per inch, full collared	STANDARD FANS:	EBM W2E143-AB15-01 (115VAC), EBM W2E143-AB09-01 (230VAC), or EBM 6224N (24VDC). Many alternate fans are available. MODEL 733 can also be provided without fans.
TUBE GEOMETRY:	(10) tubes per row x (2) rows = (20) total tubes. Tubes 0.375" OD x 0.028" wall located on 0.750" centers. Rows located on 0.650" centers.	THERMAL PERFORMANCE:	100-to-195 W/C pending fan selection and coolant flow (see performance curves)
TUBE CIRCUIT:	One all-series circuit of (20) tubes. Alternate parallel circuits are available for reduced coolant dP applications.	RoHS:	All standard 73 SERIES heat exchangers can be made RoHS compliant upon request. Any alternate fans, sensors, or non-standard fitting may affect RoHS compliance. Please consult the factory.
MAX. RECOMMENDED FLOW:	(Tap water) 4 GPM for standard all-series tube circuit / 8 GPM for optional parallel tube circuit		
COOLANT COMPATIBILITY:	Corrosive coolants (Typically deionized water or other aggressive coolants)		
PRESSURE TEST:	100% pressure tested at 150 PSIG Nitrogen under water.		

SUPERIOR CONSTRUCTION

FINS:

C11000 Copper, Oxygen-free high thermal conductivity (OFHC). Thermatron's unique riffled & corrugated wavy fin, 0.0053" thick, stacked 17.5 fins per inch. The highest thermal performer in its class worldwide. Mechanically-expanded full collar fin/tube interface for maximum heat transfer.

METAL JOINING:

All joints precision TIG welded by Thermatron experts under Argon purge to keep tube interiors free of oxidation and ensure weld integrity. Thermatron TIG welds have no known life failures after 40+ years of field operation. All **73 SERIES** heat exchangers are 100% pressure tested at 150 PSIG Nitrogen under water. Thermatron inspectors scribe their unique ID code on every HX to confirm successful pressure test.

WETTED INTERIOR:

Tubes, manifolds, return bends, and fittings 316L Stainless Steel. All core tubes 0.375" OD x 0.028" wall thickness. Precision "1D" tube bends are supported by internal mandrels for smooth ID flow, minimizing distortion and wall thinning.

EXTERIOR:

All **73 SERIES** heat exchanger shrouds are 5052-H32 Aluminum x 0.060" thick and have gold iridite finish.

QUALITY ASSURANCE:



All **73 SERIES** heat exchangers are 100% pressure tested at 150 PSIG Nitrogen under water. Thermatron inspectors scribe their unique ID code on every HX to confirm successful pressure test.

DATE CODE:

All **73 SERIES** heat exchangers are date coded by lot.

INTERNAL CLEANLINESS:

Industry-leading internal tube cleanliness, computer grade. High temperature / high flow flushes of Liqualin, Drycid and neutralizer, followed by COBRATEC 99 flush for corrosion inhibition.

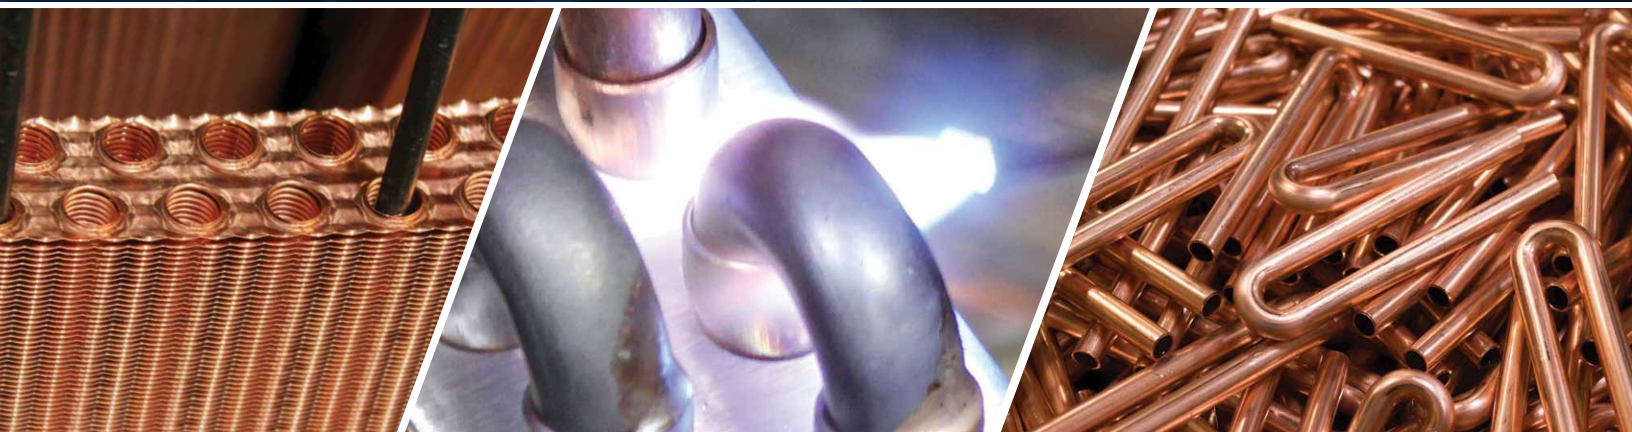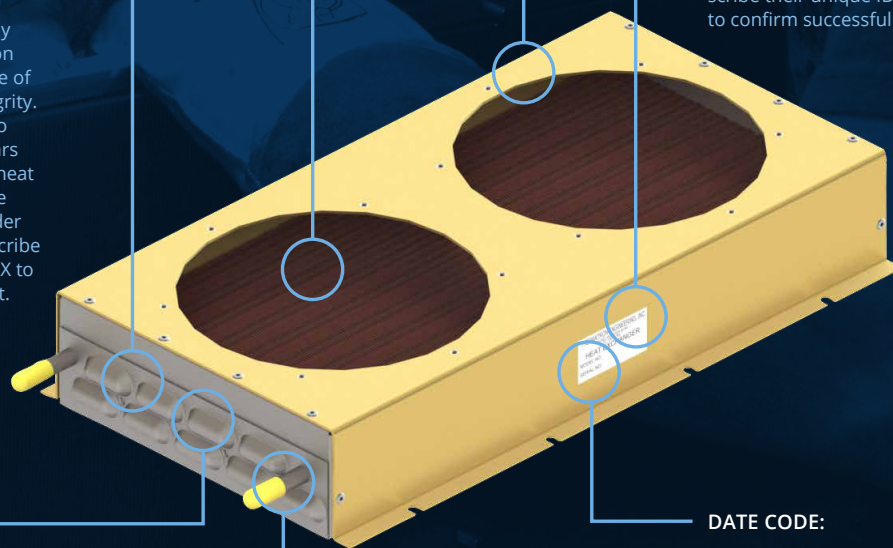

FAN SELECTION

The intersection of the heat exchanger pressure curve (black curve) with the chosen fan performance curve is the expected air flow through the heat exchanger, assuming no additional air flow restrictions other than the heat exchanger itself (e.g. cabinet blockage, ducts, bends in air loop, dust filters, etc.) As a baseline, Fans A, B and C represent standard selections for 230VAC, 24VDC, and 115VAC respectively. If higher thermal performance is required a stronger (and louder) fan option like Fan D, E, or F can be selected to increase the airflow.


Air flow direction is available in two options (by flipping fan):

- 1. PUSH AIR** - Air enters fan first and exhausts through HX last. Slightly better for applications cooling the water.
- 2. PULL AIR** - Air enters HX first and exhausts through fan last. Slightly better for applications cooling the air.

Air flow direction does not affect volumetric air flow.


PRESSURE DROP vs. AIRFLOW

Air Properties @ 30C, 1 bar

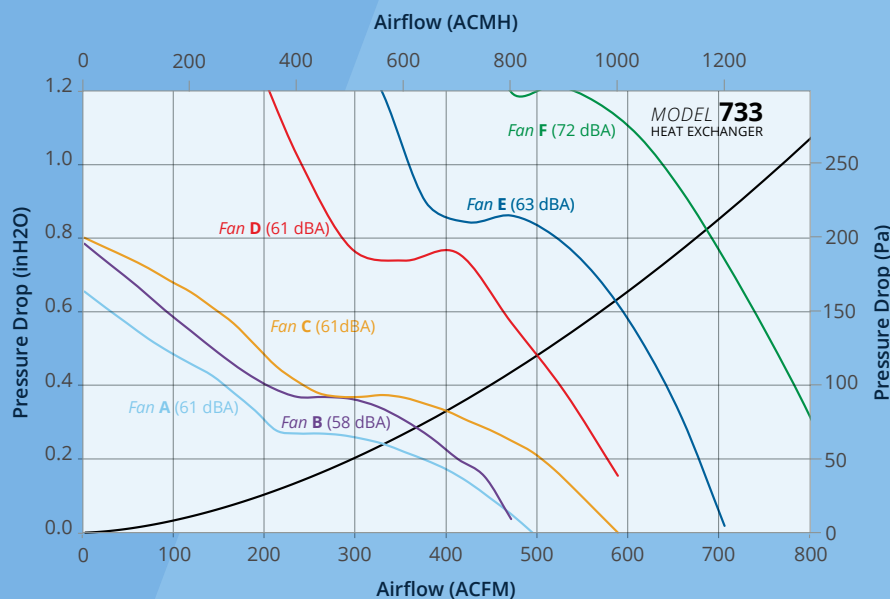

PRESSURE DROP vs. COOLANT FLOW

Water Properties @ 40C

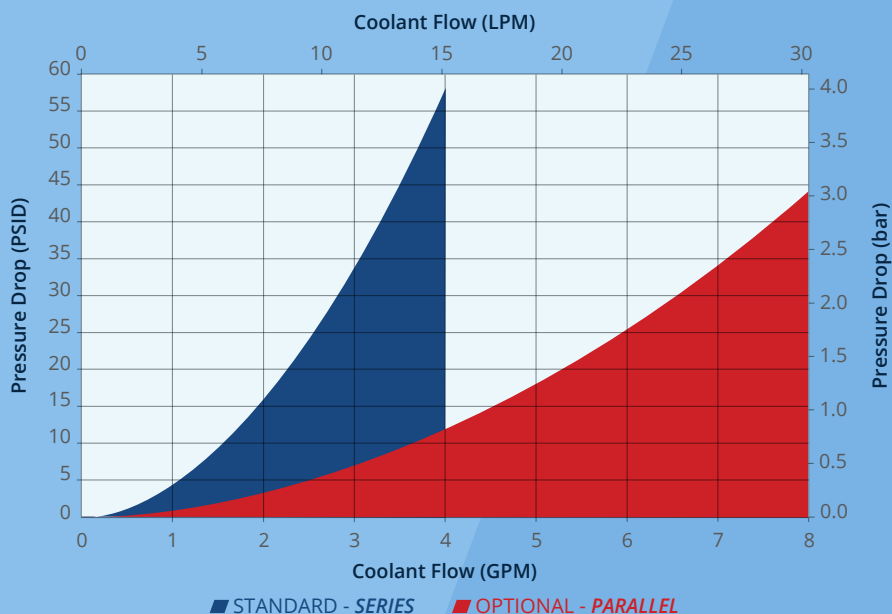

PUMP SELECTION

MODEL 733 Heat Exchanger standard plumbing configuration has all 20 tubes connected in one series circuit. This maximizes coolant velocity and thermal performance but also increases coolant pressure drop as shown by the blue line. Maximum recommended flow is 4 GPM for the series circuit in order to avoid long-term erosion corrosion. For coolant flows > 4 GPM, or for lower desired pressure drop, the plumbing configuration can also be split into two parallel circuits as shown by the red line. Splitting the flow in this way results in a small decrease in thermal performance of approximately 5%, but increases the maximum recommended flow to 8 GPM. For flows > 8 GPM **MODEL 733** can also be offered with 5 or 10 parallel circuits. Please contact Thermatron Engineering directly to discuss specific application requirements.

PERFORMANCE

Heat exchangers require some temperature difference between the entering liquid and entering air in order to transfer heat, the larger this temperature difference, the more heat can be transferred.

Thermal performance of all Thermatron Engineering heat exchangers is determined as follows:

COOLING THE WATER:


$$\text{PERFORMANCE (W/C)} = \frac{\text{Heat Load (W)}}{\text{Water Temp Enter HX (°C) - Air Temp Enter HX (°C)}}$$

COOLING THE AIR:

$$\text{PERFORMANCE (W/C)} = \frac{\text{Heat Load (W)}}{\text{Air Temp Enter HX (°C) - Water Temp Enter HX (°C)}}$$

THERMAL PERFORMANCE vs. AIRFLOW

Water Properties @ 40C, Air Properties @ 30C, 1 Bar

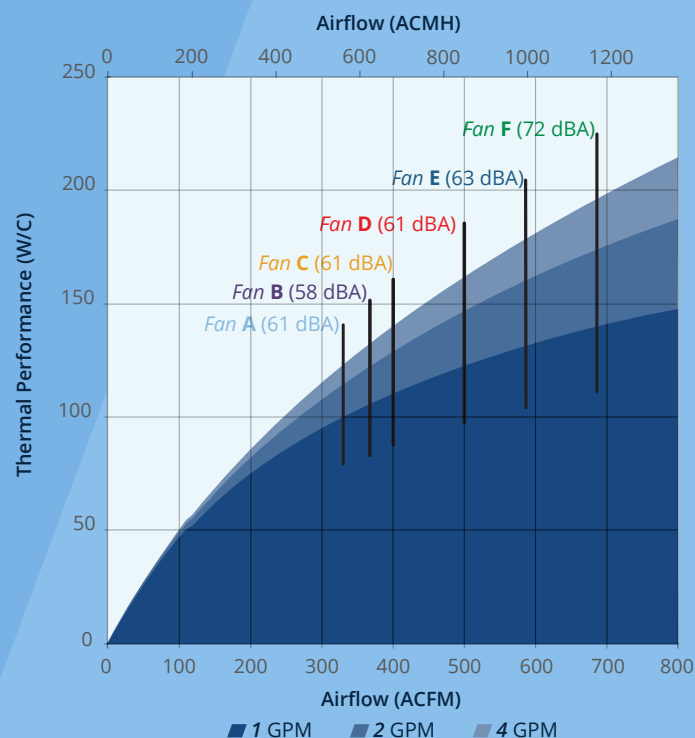

TABULATED PERFORMANCE

HEAT EXCHANGER	FAN	FAN P/N	FAN VOLTAGE	FAN NOISE (PER FAN/TOTAL)	PRESSURE DROP & AIRFLOW	PRESSURE DROP & WATER FLOW	HEAT LOAD WHEN: (WATER TEMP IN) - (AIR TEMP IN) =			
							1C	10C	30C	50C
Model 733	Fan A	(2) EBM W2E143-AB09-01	230VAC, 50 Hz	58/61 dB(A)	0.24 in H2O @ 330 ACFM	4.3 PSID @ 1.0 GPM	99.1 W	991 W	2973 W	4955 W
						15.6 PSID @ 2.0 GPM	113.7 W	1137 W	3412 W	5686 W
						57.9 PSID @ 4.0 GPM	122.4 W	1224 W	3671 W	6119 W
Model 733	Fan B	(2) EBM 6224 N	24VDC	55/58 dB(A)	0.29 in H2O @ 367 ACFM	4.3 PSID @ 1.0 GPM	104.8 W	1048 W	3144 W	5240 W
						15.6 PSID @ 2.0 GPM	121.6 W	1216 W	3647 W	6079 W
						57.9 PSID @ 4.0 GPM	131.6 W	1316 W	3949 W	6582 W
Model 733	Fan C	(2) EBM W2E143-AB15-01	115VAC, 60 Hz	58/61 dB(A)	0.33 in H2O @ 400 ACFM	4.3 PSID @ 1.0 GPM	109.5 W	1095 W	3284 W	5474 W
						15.6 PSID @ 2.0 GPM	128.1 W	1281 W	3844 W	6407 W
						57.9 PSID @ 4.0 GPM	139.5 W	1395 W	4185 W	6975 W
Model 733	Fan D	(2) EBM 6314 2HP	24VDC	58/61 dB(A)	0.48 in H2O @ 500 ACFM	4.3 PSID @ 1.0 GPM	121.7 W	1217 W	3651 W	6085 W
						15.6 PSID @ 2.0 GPM	146.0 W	1460 W	4379 W	7298 W
						57.9 PSID @ 4.0 GPM	161.3 W	1613 W	4839 W	8064 W
Model 733	Fan E	(2) EBM 6314 2TDHP	24VDC	60/63 dB(A)	0.63 in H2O @ 586 ACFM	4.3 PSID @ 1.0 GPM	130.4 W	1304 W	3911 W	6519 W
						15.6 PSID @ 2.0 GPM	159.3 W	1593 W	4778 W	7964 W
						57.9 PSID @ 4.0 GPM	178.0 W	1780 W	5340 W	8901 W
Model 733	Fan F	(2) EBM 6314 2TDHHP	24VDC	69/72 dB(A)	0.82 in H2O @ 686 ACFM	4.3 PSID @ 1.0 GPM	138.9 W	1389 W	4168 W	6946 W
						15.6 PSID @ 2.0 GPM	172.9 W	1729 W	5188 W	8646 W
						57.9 PSID @ 4.0 GPM	195.6 W	1956 W	5868 W	9779 W

Technical drawing of the CLS-632-2 fan assembly, showing front, side, and detail views with dimensions.

Front View Dimensions:

- Overall Width: 12.00" (3 X 4.00" = 12.00" (TWO PLACES))
- Overall Height: 9.00"
- Top Mounting Flange: 2X 2.05"
- Bottom Mounting Flange: 2X 1.50" ± .13"
- Right Side Mounting Flange: 2X .44"
- Left Side Mounting Flange: 2X 3/8" OD FITTINGS
- Internal Circular Features: 6X PEM INSERT CLS-632-2 EQUALLY SPACED ON A 6.38" B.C. (FAN MOUNTING) (TWO PLACES)

Side View Dimensions:

- Overall Width: 2.60"
- Overall Height: 8.12"
- Top Mounting Flange: 2X 1.25" ± .13"
- Bottom Mounting Flange: 1.32" ± .13"

Detail View Dimensions:

- Overall Width: 4.76" (FAN + FINGER GUARDS)
- Overall Height: 4.58" (FAN)
- Internal Circular Features: 6X PEM INSERT CLS-632-2 EQUALLY SPACED ON A 6.38" B.C. (FAN MOUNTING) (TWO PLACES)

Labels:

- FAN
- 6X PEM INSERT CLS-632-2 EQUALLY SPACED ON A 6.38" B.C. (FAN MOUNTING) (TWO PLACES)
- 2X 3/8" OD FITTINGS
- 2X 1.25" ± .13"
- 1.32" ± .13"
- 2X 1.50" ± .13"
- 2X 2.05"
- 3 X 4.00" = 12.00" (TWO PLACES)
- 2X .44"
- 8.12"
- 9.00"
- 2.60"
- .20" TYP.
- .21" TYP.

733 *TPP2*

PART NUMBERING SYSTEM

- FIN / TUBE MATERIAL**
2 = CU FIN / CU TUBE
3 = CU FIN / SS TUBE
4 = SS FIN / SS TUBE
5 = CU FIN / CU-NI TUBE
6 = AL FIN / SS TUBE
7 = AL FIN / CU TUBE

- FITTING GEOMETRY**
M = OTHER
S = STRAIGHT
T = 90° ANGLED FITTING

LTR	FAN SIZE	FAN SHAPE	FASTENER	MOUNTING PATTERN
S	80 mm	SQUARE	(4) #6-32	71.5 x 71.5 mm
M	119 mm	SQUARE	(4) #6-32	104.8 x 104.8 mm
P	172 mm	ROUND	(4) #6-32	162 mm BC
J	172 x 150 mm	OVAL	(4) #6-32	162 mm BC
T	176 mm	SQUARE	(4) #10-32	152.4 x 152.4 mm
E	225 mm	SQUARE	(4) #8-32	240 mm BC
C	254 mm	ROUND	(8) #8-32	246 mm BC
O	OTHER	OTHER	OTHER	OTHER


7 3 3 X X P X A X X

- HEAT EXCHANGER SIZE**
0 = 1 FAN (119 mm SQ)
1 = 2 FANS (119 mm SQ)
2 = 1 FAN (172 mm RND)
3 = 2 FANS (172 mm RND)
4 = 1 FAN (254 mm RND)
5 = 2 FANS (254 mm RND)
6 = 6 FANS (172 x 150 mm OVAL)
7 = 4 FANS (254 mm RND)

- FITTING TERMINATION**
B = HOSE BEAD (3/8")
L = STRAIGHT TUBE (3/8")
N = 37° FLARE NUT (3/8")
P = NPT FEMALE (1/4")
R = HOSE BARB (3/8")
C = OTHER

- FAN VOLTAGE**
0 = FAN NOT SUPPLIED
1 = 110VAC
2 = 220VAC
3 = OTHER
4 = 12VDC
5 = 24VDC
6 = 48VDC

- CUSTOM NUMBER**
 ASSIGNED BY THERMATRON
**INDICATES CUSTOM AND
 VERSION LEVEL**
 ASSIGNED BY THERMATRON

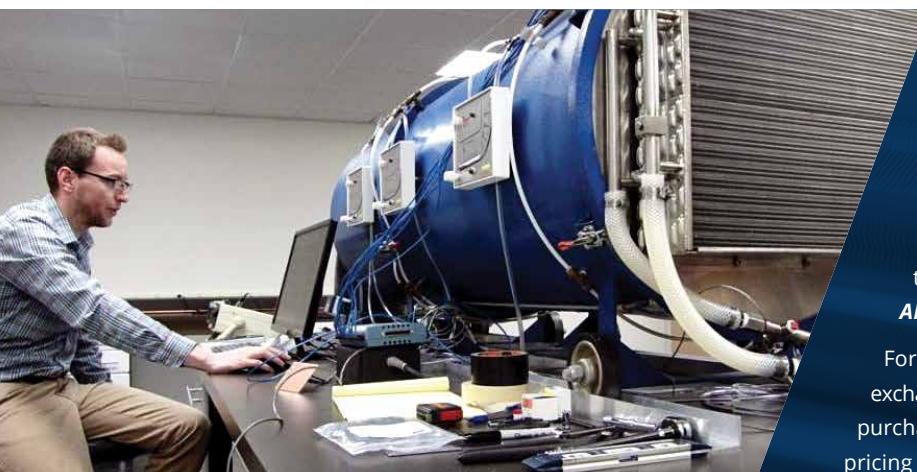

CONTACT OUR EXPERTS

Our thermal experts will be happy to review your application and offer standard or custom solutions, including thermal analysis (single phase or multi-phase) and CAD drawings tailored to your special requirements...**ALL AT NO CHARGE AND WITHIN 24 HOURS!**

For many custom applications Thermatron will also ship heat exchanger prototypes for **FREE 90-DAY CLIENT EVALUATIONS**, with purchase subject only to **COMPLETE CLIENT SATISFACTION**, and pricing subject only to follow-on orders. Thermatron engineers will also add recommendations for fans, pumps, filters, fittings, cabinet adaptations, brackets, etc., so that you receive the best overall thermal solution the very first time...**PUT US TO THE TEST!**

For more information please contact the factory at **978.687.8844** or **INFO@THERMATRONENG.COM**.